


# 0.70mm MW5R Class B Non-Fragility Installation Method

This detail has been tested in accordance with ACR(M)001:2005 to meet the requirements for Non-fragile Class B at all purlin centres up to 2.1m, on straight sheet, curved sheet and at hips. Side lap fixings and lap sealant have been shown to indicate recommended installation practice. However, no reliance is made on these ancillaries to achieve the non-fragility status.

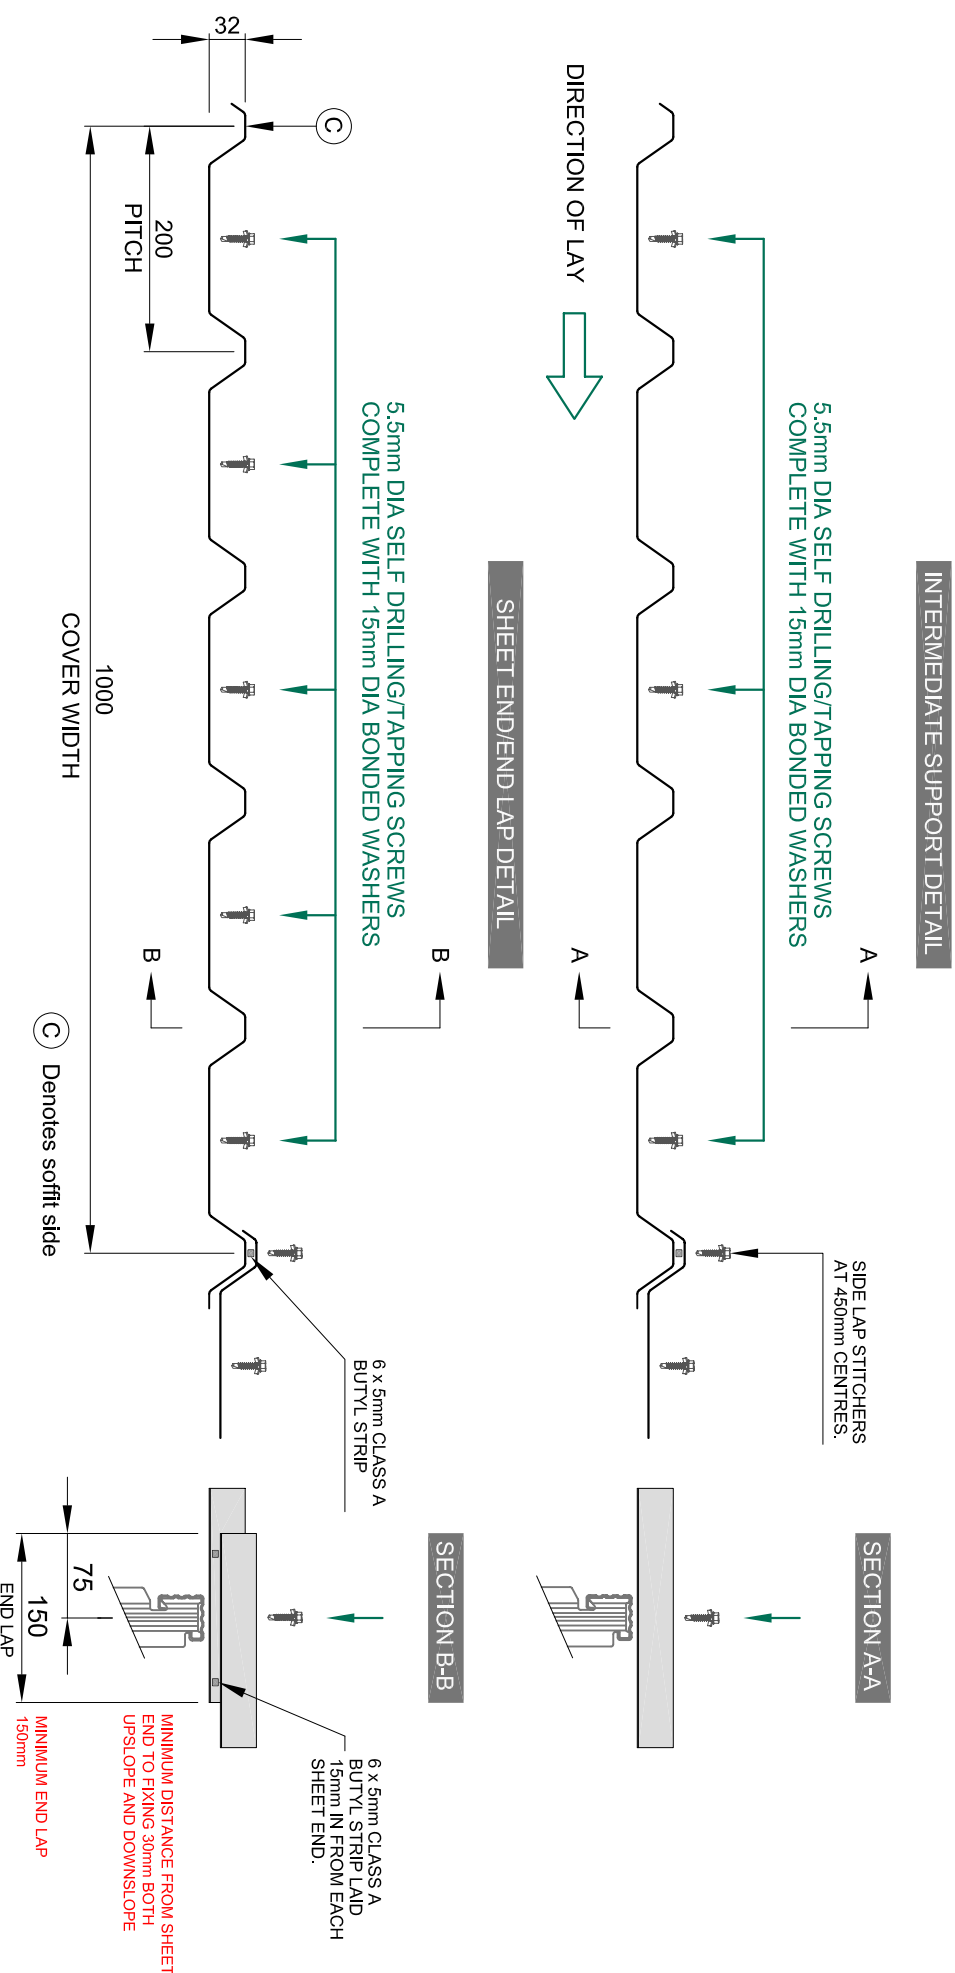

ISSUE DETAILS		
Rev:	Description:	Drawn By:
0	Original Issue	John Summers
		Date:
		26/04/07

**QUEDRON**  
ROOFING & CLADDING PRODUCTS

Quedron Limited  
Runnings Road  
Kingsditch Trading Estate  
Cheltenham Gloucestershire  
GL51 9NQ

T 01242 241222 F 01242 584934  
E profilesales@quedron.co.uk  
W www.quedron.co.uk

Title:	0.70mm MW5R STEEL ROOF CLADDING SHEET CLASS B NON-FRAGILITY INSTALLATION METHOD
Scale:	NOT TO SCALE
Drawing No:	QD1094
Rev:	0